

INCREASE PRODUCTIVITY. LOWER OVERHEAD




OUR AUTONOMOUS SOLUTION DELIVERS RELIABLE, INDUSTRIAL-GRADE SWEEPING — KEEPING DUST, DEBRIS, AND CLUTTER UNDER CONTROL ACROSS EVERY AISLE, DOCK, AND STAGING ZONE. LET YOUR TEAM STAY FOCUSED ON PICKING, PACKING, AND SHIPPING — NOT SWEEPING. CLEANER FLOORS LEAD TO **SAFER FORKLIFT OPERATIONS**, **FEWER PRODUCT DAMAGES**, AND A **MORE PROFESSIONAL ENVIRONMENT** FOR AUDITS AND CUSTOMER WALKTHROUGHS. WITH **REAL-TIME PERFORMANCE DATA** AND AUTOMATED SCHEDULING, YOU GET COMPLETE VISIBILITY AND CONTROL — WITHOUT THE HASSLE OF MANAGING JANITORIAL LABOR.

CONSISTENT, HEAVY-DUTY SWEEPING — EVERY SHIFT, WITHOUT INTERRUPTION.

ALLOW YOUR WORKFORCE TO FOCUS WHERE VALUE THRIVES

**AUGMENT
&
AMPLIFY
LABOR BY THE HOUR
~REDEFINED~**



- REDUCED CYCLE TIMES
- + IMPROVED INVENTORY MANAGEMENT
- + INCREASED SAFETY METRICS
- + ELEVATED WORKFORCE AND LABOR IMPACT

MORE VALUE WITH LESS OVERHEAD

NO DEBRIS TOO BIG OR SMALL


THE DUAL-DISC BRUSHES EASILY HANDLE LARGER DEBRIS LIKE PALLET SCRAPS AND BOTTLES, WHILE EFFICIENTLY SWEEPING UP FINE DUST AND DIRT TO ENSURE NO SMALL PARTICLES ARE LEFT BEHIND.



LEARN MORE
Scan Me!

WWW.APPROACHAUTOMATION.COM



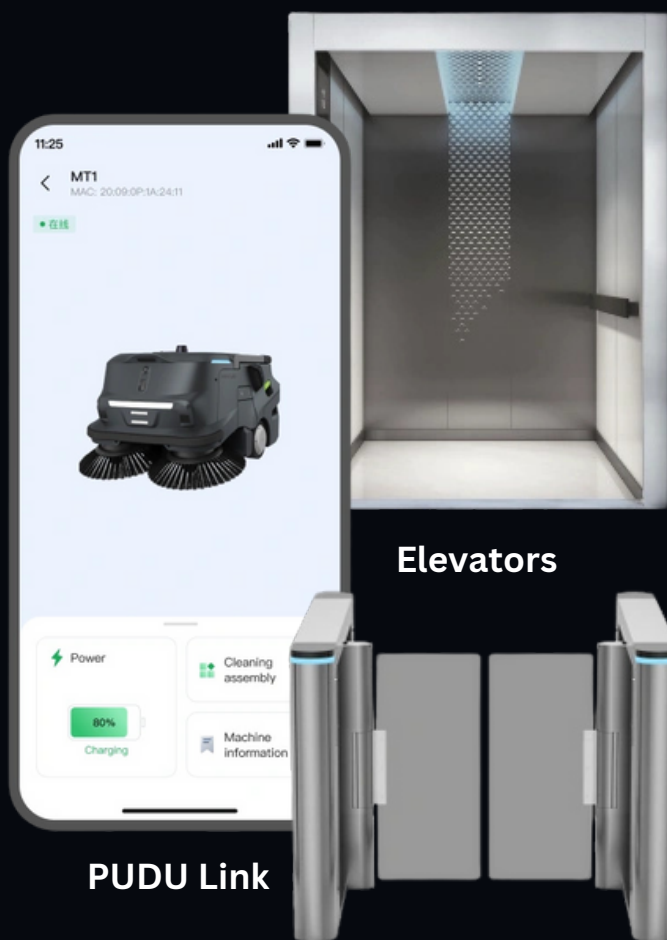

PUDU Link

Elevators

Doors and E-Gates

Robot Dimensions (L × W × H)

31.5 in × 23.6 in × 19.3 in

Robot Weight

143 lbs

Cleaning Performance

Max 19375.04 ft²/h (Standard Cleaning Mode)

Max 64583.46 ft²/h (Spot Cleaning Mode)

Trash Bin Capacity

1.2 ft³

Run-time

4-8h (differentiated by cleaning levels)

Charging Time

< 3h

Navigation Method

VSLAM+Marker+Lidar SLAM

Cruise Speed

0.2 m/s ~ 1.2 m/s (0.66 ft/s-3.94 ft/s)
(adjustable)

LEARN MORE
Scan Me!

